
IMPACT ACOUSTIC®



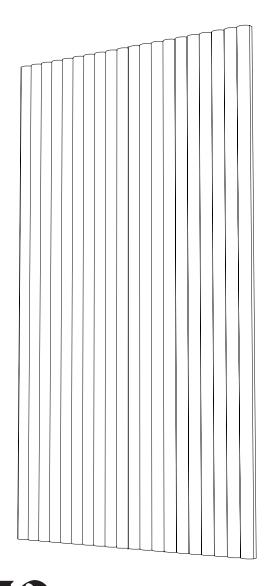

PALLADIO Volumetric Wall Covering

713.12.14.000.00

Assembly Guide

Verify and organize


Verify all delivered elements and organize them based on the included labeling of each part and the supplied drawings. Please note that optional items and installation hardware will be provided based on particular order specification.

PALLADIO Volumetric Wall Covering 713.12.14.000.00

2x Z-Clip Profile 600mm 938.12.20.000.00.CUT

10x 3.9x11mm T15 Screws PF35.337200


C00091 Aluminium Wall Mount Profile per piece.

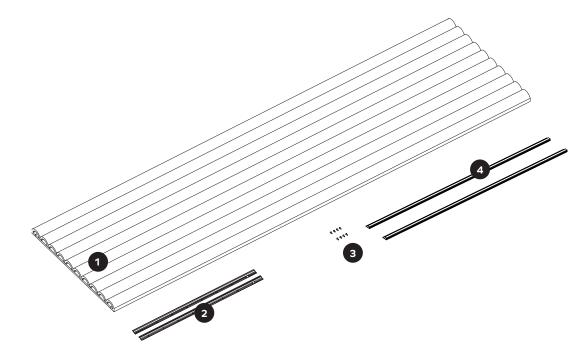

Assembly Overview


On-site adjustments.

Palladio panels can be adjusted on site using standard tools like a utility knife, a crown drill (hole saw) or a circular saw. The cuts should be done along the fluting module. Cutting the panel will release the fluting element from the slot - please use HOT GLUE to secure the open edge of the panel if you decide to cut it. The aluminium profiles can also be trimmed using a power saw with a steel blade or an angle grinder.

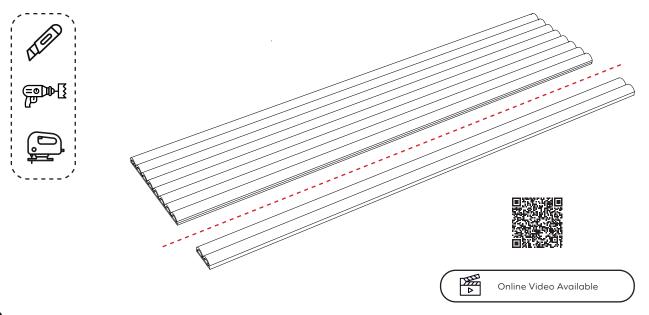

2 Install Z-Clip profiles on the back of the panel.


Install at least 2 profiles on the back of the panel using 3.9x11mm T15 Screws. If required, profiles can be cut on site using a metal blade jig saw or blade saw.

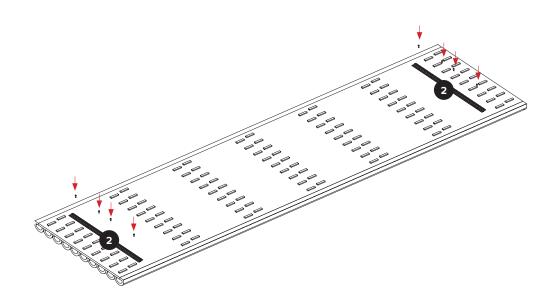

Installation Overview

Install optional wall mounting profiles on the wall.


Aluminium Wall Mount Profiles (4) should be installed on the wall using appropriate mounting hardware (screws, expansions plugs, bolts) which needs to be selected according to the wall type. These are not included in the scope of the delivery. We recommend using 2 rows on the mounting profiles. Spacing should be aligned with the Z-clip profiles spacing installed on the back of the panel in the previous step.

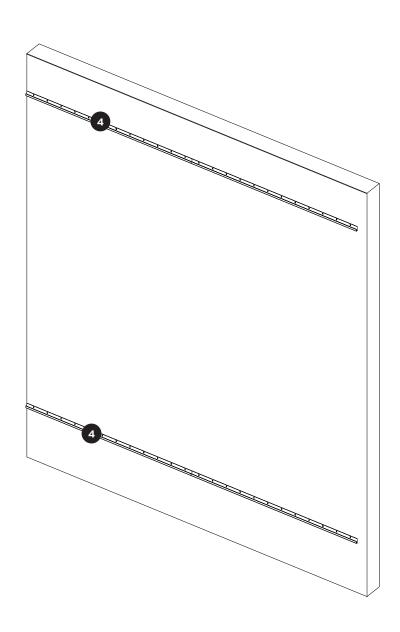

Installation Overview

2 Hang the Palladio panels onto pre-installed wall mount profiles.

Z-Clip aluminium profiles can be used for dry wall installation. The same profiles need to be installed at the wall and the back of the panel. Profiles will slide into each other creating reliable mount. Profiles can be cut on site to match assembly width.

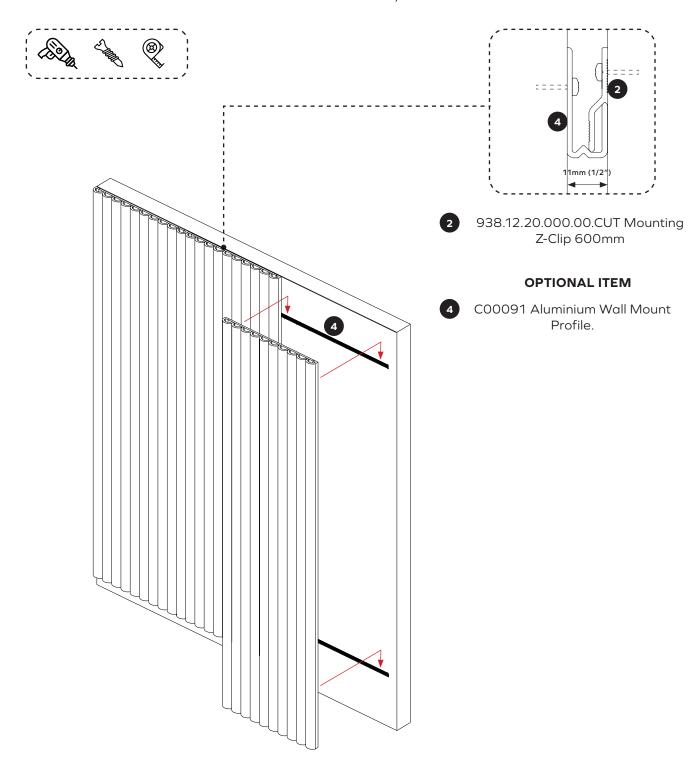

Additional Information

Online Resources

A variety of resources are available online for all of our products. Please visit the product's page for more information.



CAD files



Spec sheets and Installation Guide



Colour families



Instruction videos



Associated products specs

Ordering Process

Our experienced team of Project Consultants will guide and support you throughout the order process. We fulfill the majority of our orders in as little as 21 days¹ from your first point of contact, allowing you to focus on what truly matters to you.















Contact our consultant


Order Confirmation

Dispatch

Delivery

Contact Us

Ready to make an impact? We are just an email or call away to discuss your project and answer any question.









1 - Quote and Production times may vary.

HWe Make An Invact